



## LITELUX LED DOWNLIGHT


Cost-effective all in one, high performance LED downlight with integrated dimmable driver and CCT switch located on the back to select colour temperature between 3000K, 4000K and 6500K.

### FEATURES:



- 3 year warranty
- 35000 hrs average rated life
- Colour temperature switchable between 3000K, 4000K and 6500K
- Ø90mm cut-out
- Aluminium construction, white finish
- Complete with 1200mm flex & plug and integrated dimmable driver
- Easy to install clips
- CRI>80
- IP65 from below
- TA40
- IC-4 rated
- Complies with AS/NZ60598.2.2.2016

### APPLICATIONS:

- Apartments
- Residential housing
- IP65 for both interior and exterior applications



IC-4  
Cut out  
Ø90mm

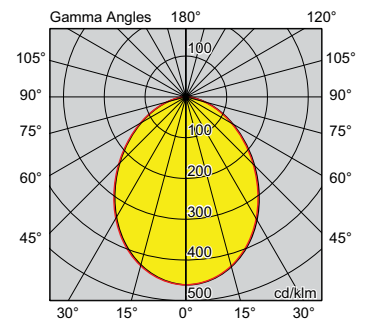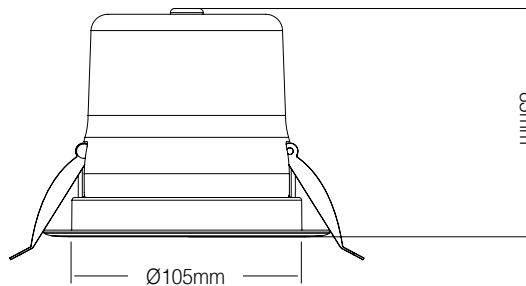

LITELUX LED DOWNLIGHT  
10W 3000K / 4000K / 6500K

PRODUCT CODE	VERSION	WATTAGE	CCT	DELIVERED LUMENS*	MASS
DLP63/4/65RW	10W SWITCHABLE CCT DIMMABLE IP65	10W	3000K / 4000K / 6500K	861lm	0.25kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses.