


APOLLO PRO 150W

PROFESSIONAL SERIES LED HIGHBAY



4000K
Colour Temperature



5 year +
3 year OnSite*



IP65
Rated



IK10
Rated

FEATURES

- Ultra efficient system efficacy of up to 125lm/W
- High quality Lumileds LED chips and Mean Well Driver
- Innovative protective dust cover
- Shatterproof polycarbonate lens
- Low UGR of 25
- 3m Flex and Plug
- >60,000hrs to L80
- Carabiner included
- Epoxy anti-corrosion coating



LIGHTING DATA

LIGHT SOURCE	Lumileds 3030 2D
LUMEN OUTPUT	18,671lm
LUMINAIRE EFFICACY	125lm/W
LIFETIME @L80 (TM-21)	>60,000hrs
LIFETIME @L90 (TM-21)	43,000hrs
CCT	4000K / 5700K
CRI	>80
SDCM	<3
BEAM ANGLE	100°
UGR	25

ELECTRICAL DATA

POWER SUPPLY	Mean Well ELG-150-48A
SYSTEM WATTAGE	153w
MAINS VOLTAGE	AC100-277V / 50-60 Hz
POWER FACTOR	>0.95
THD	<20%
INRUSH CURRENT	65A
DRIVER LIFETIME	>50,000hrs
CONNECTION	3m 3 core cable with 3 pin plug
DIMMABLE OPTIONS	DALI, 1-10V

DESIGN / CONSTRUCTION

BODY MATERIAL	ADC12 AL
LENS MATERIAL	Polycarbonate
FINISH	Epoxy anti-corrosion coating
COLOUR	Black
MOUNTING OPTIONS	Suspended/Surface
WEIGHT	5.72kg
CODE	APOLLO150 PRO CW

TECHNICAL DATA

IP RATING	IP65
IK RATING	IK10
OPERATING TEMP	-30° to +45°C
PROTECTION CLASS	Class 1
CERTIFICATIONS	SAA
DOCUMENTATION	LM-79 / LM-80 / ISTMT / TM-21
WARRANTY	Professional (5 Year product replacement, 3 year OnSite*)

*See warranty section on our website for T&C's


LED APOLLO

LED HIGHBAY SERIES


ADDITIONAL IMAGES



PHOTOMETRIC DIAGRAMS

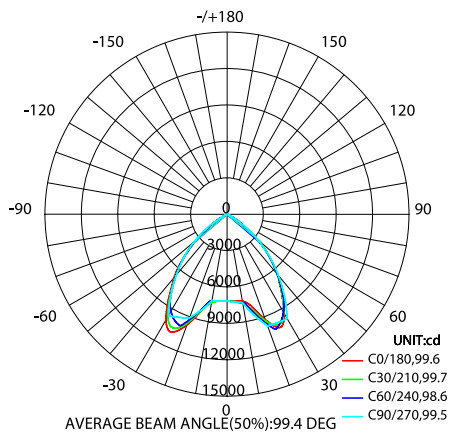

150W

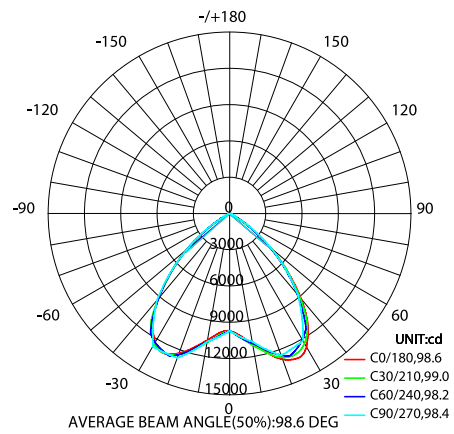

200W

DIMENSIONAL DRAWINGS

