



ultra-high airflow

without all the noise

150mm Bathroom & Kitchen Through Wall Fan Kit

For best results, Simx recommend this product for bathrooms and kitchens.

In kitchen installations, do not install the fan kit, laterally, any closer than 2m from the cooktop. Visit our website for information on kitchen fans with a washable metal grease filter.

Once installed, following the instructions supplied, this product complies with the G4 Building Code for bathrooms and kitchens.

The Healthy Homes Standard requirement for bathroom or kitchen installation in a rental property is also met.

FAN7190 - standard switching

FAN7191 - timer switching



125mm Bathroom Through Wall Fan Kit

For best results, Simx recommend this product for bathrooms.

Once installed, following the instructions supplied, this product complies with the G4 Building Code for bathrooms.

The Healthy Homes Standard requirement for bathroom installation in a rental property is also met.

FAN7187 - standard switching


FAN7188 - timer switching





WIRING DIAGRAM

220-240V AC 50 Hz

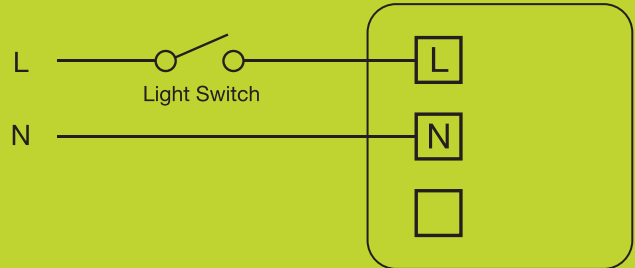

The single speed fan is switched via an existing or a new light switch, or auto sensor, (switch and sensor not supplied)

KIT CONTENTS




Axial Fan Through Wall Ducting Weatherproof Cowl

TECHNICAL SPECIFICATIONS

Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	IP Rating	Switching	Order Code
				(l/s)	(m ³ /hr)					
150	Axial	22	138	114	410	0.19	41	IPX4	Standard	FAN7190
									Timer	FAN7191
125	Axial	15	68	54	194	0.28	38	IPX4	Standard	FAN7187
									Timer	FAN7188

DIMENSIONS (mm)

Model	A	B	C	D	E	F	G	H
FAN7190 FAN7191	174	30	150	375	146	111	30.5	227
FAN7187 FAN7188	160	30	125	375	120	100	29	185

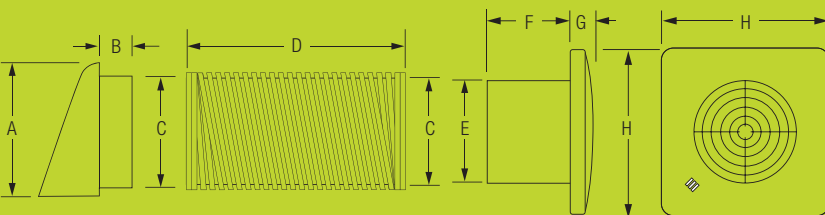

E6337

Complies with AS/NZS Standards
Specifications are subject to change without notice.

Distributed by Simx Limited

PO Box 14347, Panmure, Auckland 1741, New Zealand

p +9 259 1660 | e enquiry@manrose.co.nz | w www.manrose.co.nz