



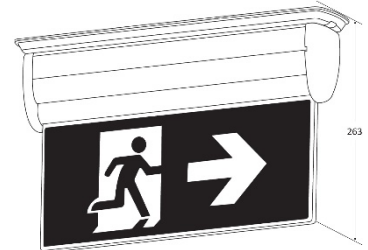

## CLEVERTRONICS LP SWINGBLADE LED EXIT

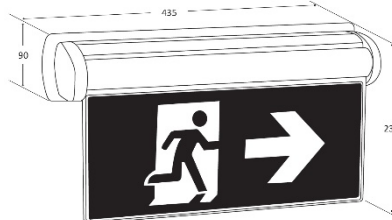

### PRODUCT INFORMATION

Catalogue Number	CSBLED
Description	LP Premium Swingblade Emergency Exit
Construction	Metal frame, White End Caps with Acrylic & Polycarbonate Diffuser
Mounting	Surface Mount, Wall or Ceiling on a slide connect bracket – Single & Double Sided "NOTE: If product is suspended below the Ceiling or Mounted on a metal surface the Swingblade bracket cover plate accessory (P/N:2740100) is required to cover the mains terminals."
Dimensions L x W x H	See diagram above
Weight	2.6kg
Operating Mode	Maintained
Testing System	N/A - Manual test switch
Battery	Lithium Iron Phosphate, 3.2V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	All directional inserts included in the box
Lamp(s)	24 x High Intensity LED, Surface Mounted onto a Replaceable Lamp Bar - 100,000hour
Operating Voltage	240V AC; 50Hz
Power Consumption	3.5 Watts (Standby), 6.2 Watts (Max)
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C <sub>0</sub> =D10 C <sub>90</sub> =E3.2
Viewing Distance	24m

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550070	BATT:LP 3.2V 3200mAh 220mm lead, sp.BRKT
8002355	PCA:Lithium S/BLADE Driver. #CT10164-L4.
8002175	PCA:24DLED UB LED Strip, #CT10156-D2

