



MASTER PL-C 2 Pin

MASTER PL-C 10W/840/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | |
|--------------------------------------|-----------------------|
| Cap base | G24D-1 [G24d-1] |
| Life to 10% failures (nom.) | 6500 h |
| Life to 50% failures (nom.) | 10000 h |
| LSF 2000 h Rated | 99 % |
| LSF 4000 h Rated | 98 % |
| LSF 6000 h Rated | 92 % |
| LSF 8000 h Rated | 78 % |
| Light Technical | |
| Colour Code | 840 [CCT of 4,000 K] |
| Lamp Luminous Flux 25°C EL (Nom) | 600 lm |
| Lamp Luminous Flux (Nom) | 600 lm |
| Colour Designation | Cool White (CW) |
| Colour Temperature, horizontal (Nom) | 4000 K |
| Lamp Luminous Efficacy EM (Nom) | 60 lm/W |

| Colour Rendering Index,horiz (Nom) | 82 |
|------------------------------------|---------|
| LLMF 2000 h Rated | 92 % |
| LLMF 4000 h Rated | 87 % |
| LLMF 6000 h Rated | 83 % |
| LLMF 8000 h Rated | 81 % |
| Operating and Electrical | |
| Power (Rated) (Nom) | 10.0 W |
| Lamp current (nom.) | 0.190 A |
| Temperature | |
| Design temperature (nom.) | 28 °C |
| Controls and Dimming | |
| Dimmable | No |

MASTER PL-C 2 Pin

Mechanical and Housing

Cap-base information 2P

Approval and Application


Energy efficiency label (EEL) B
 Mercury (Hg) content (nom.) 1.4 mg
 Energy consumption kWh/1,000 hours 13 kWh

Product Data

Full product code 871150070498600
 Order product name MASTER PL-C 10W/840/2P 1CT/5X10BOX

EAN/UPC – product 8711500704986
 Order code 927903884002
 Local order code PLC10W8402P
 SAP numerator – quantity per pack 1
 Numerator – packs per outer box 50
 Material no. (12 NC) 927903884002
 Net Weight (Piece) 45.000 g
 ILCOS code FSQ-10/40/1B-I-G24d=1


Dimensional drawing




PL-C 10W/840/2P

| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|---------------------------------------|---------|----------|---------|---------|----------|
| MASTER PL-C 10W/840/2P 1CT/5X10BOX | 27.1 mm | 27.1 mm | 75.5 mm | 95.0 mm | 117.4 mm |

Photometric data

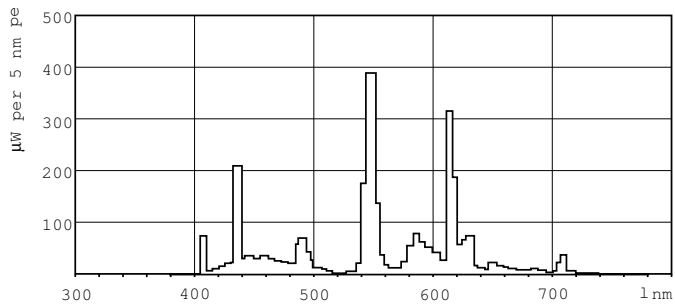

Lightcolour /840

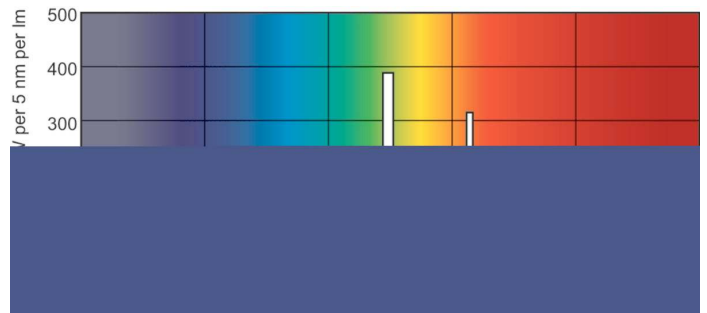

Lightcolour /840

MASTER PL-C 2 Pin

Lifetime



LDLE_PLC2P_0001-Life expectancy diagram

LDLE_PLC2P_0002-Life expectancy diagram



LDLM_PLC2P_0001-Lumen maintenance diagram

