


MERCURY

IC-F DRIVER LED DOWNLIGHT


GDL808 TC

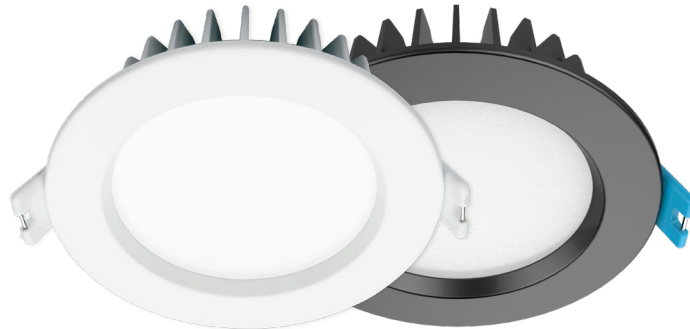

FEATURES

- Die-cast aluminium body
- Powder coated finish
- Opal acrylic diffuser
- Trailing edge dimmable driver included, pre-wired
- Extra large terminals in driver
- Quick connect plug between driver and fitting
- Select colour temperature with DIP switch
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

DIMENSION

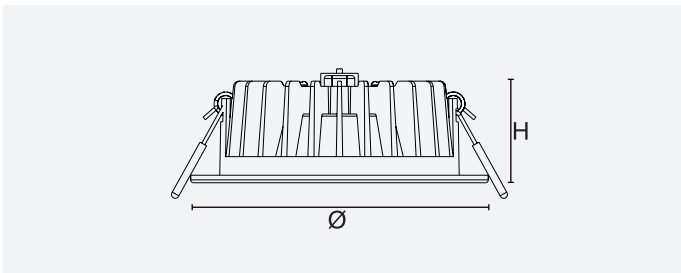

Insulation Coverable Driver And Luminaire

Insulation safely wraps over luminaire and driver - tested and approved.



OPTIONS

- DIMMING:
 - Analogue dimming (1~10V)
 - Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL808 TC WH	230	10	750/850/800	3000/4000/5700	100	102.5 X 35	90	White	32
GDL808 TC SN	230	10	750/850/800	3000/4000/5700	100	102.5 X 35	90	Satin Nickel	32
GDL808 TC BK	230	10	750/850/800	3000/4000/5700	100	102.5 X 35	90	Black	32