




# INLINE EXTRACTION FAN KITS with LED

These high efficiency inline fans are designed to provide higher levels of extraction for larger bathrooms and the LED adds light directly above your steam source (e.g. shower or bath). Mixed flow fans provide users with a two fan speed option. 5 year warranty.

Pro-Series Low Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (PA)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Model	Order Code
					(l/s)	(m³/hr)						
	150	Axial	18	91	105	380	0.17	Round White	Round White	Standard	ELLP150RWS	FAN5375
										Timer	ELLP150RWT	FAN5377
								Round Silver	Round White	Standard	ELLP150RSS	FAN5376
										Timer	ELLP150SWS	FAN5899
	125	Mixed Flow	40	220	89	320	0.45	Round White	Round White	Standard	ELLP125RWS	FAN5379
										Timer	ELLP125RWT	FAN5381
								Round Silver	Round White	Standard	ELLP125RSS	FAN5380
										Timer	ELLP125RST	FAN5382
Classic Standard Profile	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Interior Grille	Exterior Grille	Switching	Model	Order Code
					(l/s)	(m³/hr)						
	150	Axial	18	91	105	380	0.17	Round White	Eggcrate White	Standard	EL150S	FAN5369
										Timer	EL150T	FAN5370
	125	Axial	20	35	36	130	0.56	Round White	Eggcrate White	Standard	EL125S	FAN5371
										Timer	EL125T	FAN5372
	100	Axial	20	120	31	110	0.65	Round White	Eggcrate White	Standard	EL100S	FAN5373
										Timer	EL100T	FAN5374



**Note:** Installed system performance is always influenced by duct length and layout

## Switching Options

**Standard** Remote switch (not supplied).

**Timer** Remote switch (not supplied). Fan continues operating for preset time after switching off. 150mm models include fixed 7 minute timer. 125mm and 100mm model timers are 1-20 minute adjustable and require permanent and switched phase.


## Accessories

Diffuser with LED (12V 3W) and Driver	Model	White	Black	Satin Silver	Chrome	White Square
	<b>ELLP150</b>	DCT3211	-	DCT3212	-	DCT3640
	<b>ELLP125</b>	DCT3213	-	DCT3214	-	-
	<b>EL150</b>	DCT3209	DCT4255	-	DCT3208	-
	<b>EL125</b>	DCT3207	-	-	DCT3206	-
	<b>EL100</b>	DCT3205	-	-	DCT3204	-

# INLINE EXTRACTION FAN KITS with LED


## Dimensions (mm)

Model	Diffuser Cut-Out	A	B	C	D	E	F	G	H
ELLP150	165	200	143	170	185	-	200	80	148
ELLP125	140	182	122	350	60	168	100	100	-
EL150	165	200	143	170	185	200	200	74	148
EL125	145	125	155	125	195	155	170	74	118
EL100	115	130	155	90	100	27	140	74	98

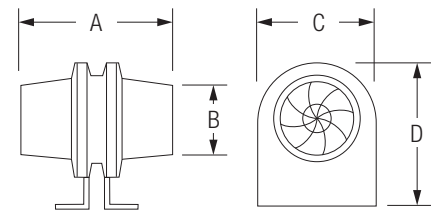


ELLP150 / EL150


**Note:** Diffuser cut-out size is a nominal diameter for a circular cut-out.

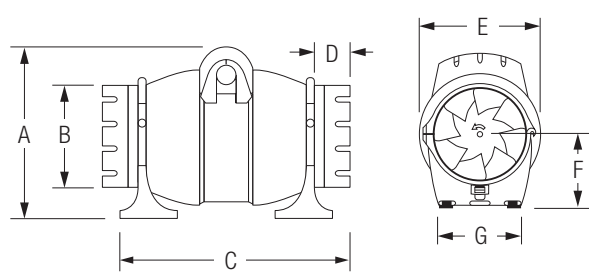

ELLP125

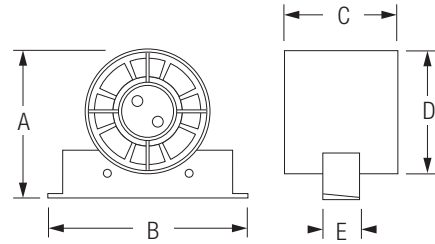

EL125

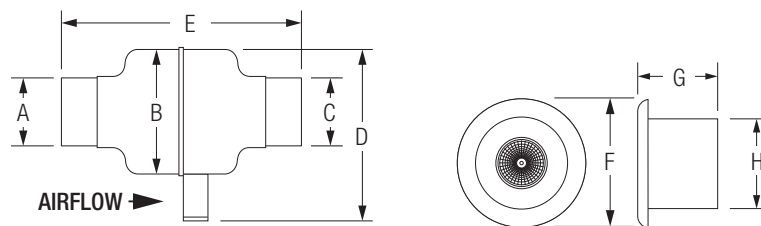

EL100

Diffuser

## Technical

Model	ELLP150	ELLP125	EL150	EL125	EL100
Supply	220-240V AC, 50Hz				
LED	12V 3W				
Total Wattage	21W	43W	21W	23W	23W
Sound Level	38 dB(A)	43 dB(A)	38 dB(A)	41 dB(A)	45 dB(A)
Max. Operating Temp	45°C	45°C	45°C	40°C	40°C
IP Rating	IP44	IPX4	IP44	IPX4	IPX4
Duct	6m Black Unilok		5m Flexible PVC	4m Flexible PVC	3m Flexible PVC