

FUSE FITTINGS

- RATED CURRENT 63A

- Insulating sleeves to protect cable entry
- Full shrouded contacts, IP20 degree of protection
- Made from tough flame retardant, non-hydroscopic material
- Anti-vibration contact design
- Tapered shank on fuse fixing screws, easy re-entry

Standards

Australian Standard AS60269

RANGE

Rated Current (Ie): 63A

Rated Voltage (Ue): 690V

Rated Peak Withstand Current:
80kA

Rated Impulse Withstand Voltage
(Uimp): 8kV

Screw Mounting Size (all): M5


Weight 1P (Front wire): 0.32kg

Max Cable Size (front): 50mm²

Max Cable Size (rear): 35mm²

Maximum Tightening Torque
(front): 2.5-3Nm

Fuse Type (suit all): TIA/TIS_

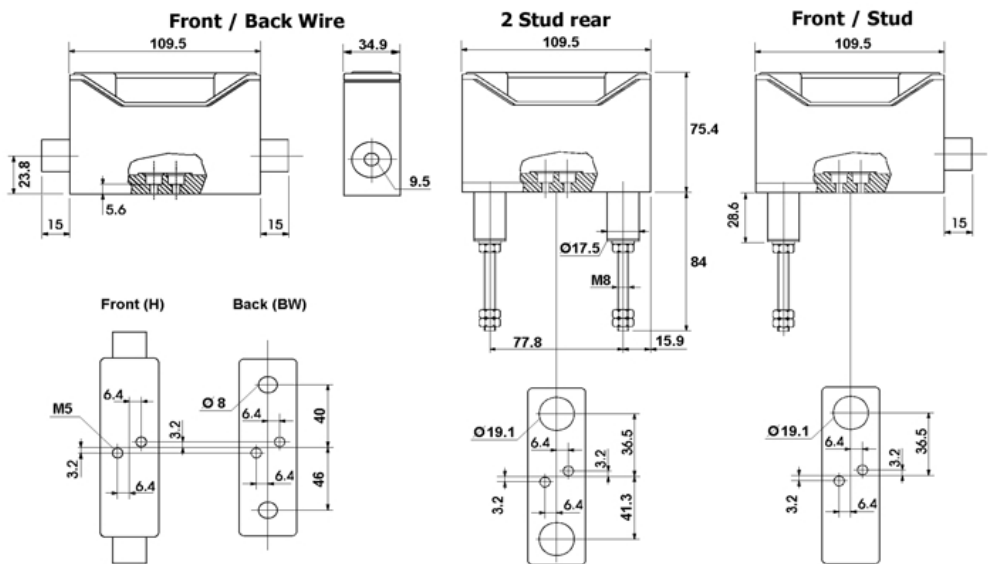

PRODUCT SPECIFICATIONS

Cat No.	Rated Current (A)	Type of Connection	Colour	Pack Quantity
TNFC63FW	63A	Front Wire	Black	10
TNFC63PANEL		Busbar/Front Wire	Black	
TNFC63STUD		2 Stud Rear	Black	
TNFC63BW		Back Wire	Black	
TNFC63LOCK		Padlock Barrier	Yellow	1
TNFC63RED		Red Safety Handle	Red	1