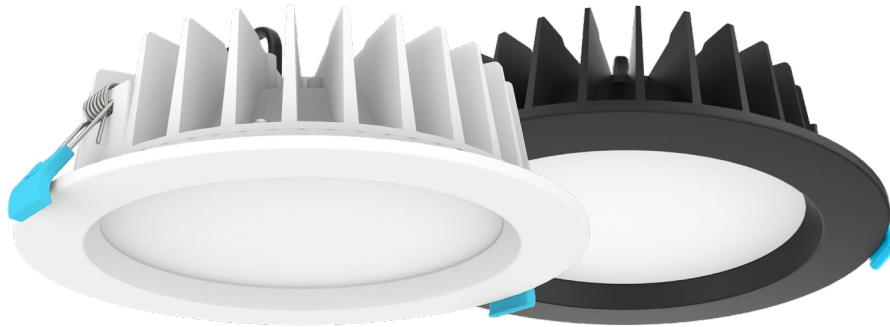


MERCURY



IC-F DRIVER LED DOWNLIGHT

GDL851/2/3 TC


FEATURES

- Die-cast aluminium body
- Powder coated finish
- Opal acrylic diffuser
- Trailing edge dimmable driver included, pre-wired
- Extra large terminals in driver
- Quick connect plug between driver and fitting
- Select colour temperature with DIP switch
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

DIMENSION

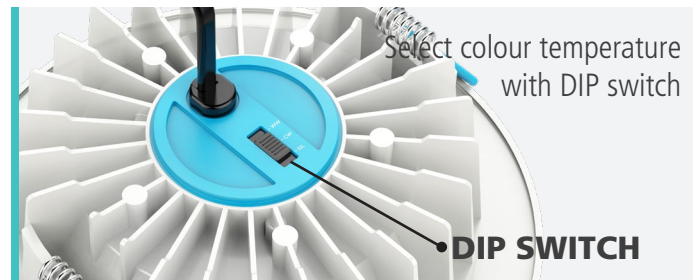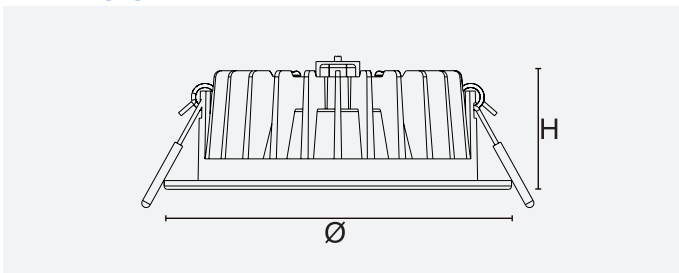

Insulation Coverable Driver And Luminaire

Insulation safely wraps over luminaire and driver - tested and approved.



OPTIONS

- DIMMING:
 - Analogue dimming (1~10V)
 - Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL851TC WH	230	11	1000/1100/1045	3000/4000/5700	100	120 X 39	100	White	32
GDL851TC BK	230	11	1000/1100/1045	3000/4000/5700	100	120 X 39	100	Black	32
GDL852TC WH	230	12	1200/1250/1250	3000/4000/5700	100	150 X 35	120	White	32
GDL852TC BK	230	12	1200/1250/1250	3000/4000/5700	100	150 X 35	120	Black	32
GDL853TC WH	230	15	1550/1700/1650	3000/4000/5700	100	165 X 48	140	White	24
GDL853TC BK	230	15	1550/1700/1650	3000/4000/5700	100	165 X 48	140	Black	24

Specifications above are for reference only and may vary without prior notice