

# BI COLOUR LED TROFFER

SLIM RECESSED BACK LIT LED TROFFER - SELECT COLOUR TEMPERATURE WITH DIP SWITCH

**GTF4101 BC**




## FEATURES

- Extruded aluminium frame
- Powder coated finish
- High transparency PS diffuser
- Constant current LED driver included, pre-wired
- Standard metric T-Bar ceiling recessed installation
- Select colour temperature (Cool White, Daylight) with DIP switch
- LED lifespan: 50000 Hours @ L70, Ta 25°C
- Ta: -20 to +40°C



## DIMENSION

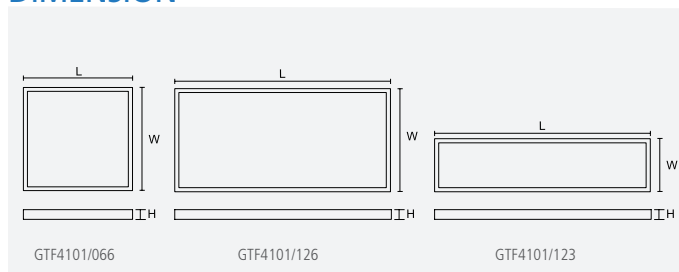

## OPTIONS

- **DIMMING:**
  - Analogue dimming (Trailing edge, 1~10V)
  - Digital dimming (DSI, DALI)
- **INSTALLATIONS:**
  - Plaster ceiling recessed installation
  - Surface mounted installation
  - Suspended installation


## TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (L×W×H) (mm)	FITTING COLOUR	CARTON QUANTITY
GTF4101/066 BC	230	35	4025	4000/5700	110	595 x 595 x 32	White	2
GTF4101/123 BC	230	35	4025	4000/5700	110	1195 x 295 x 32	White	2
GTF4101/126 BC	230	48	5760	4000/5700	110	1195 x 595 x 32	White	2

# Super slim Backlit Troffer

## Light weight, easy for installation

EXPLODED DRAWING

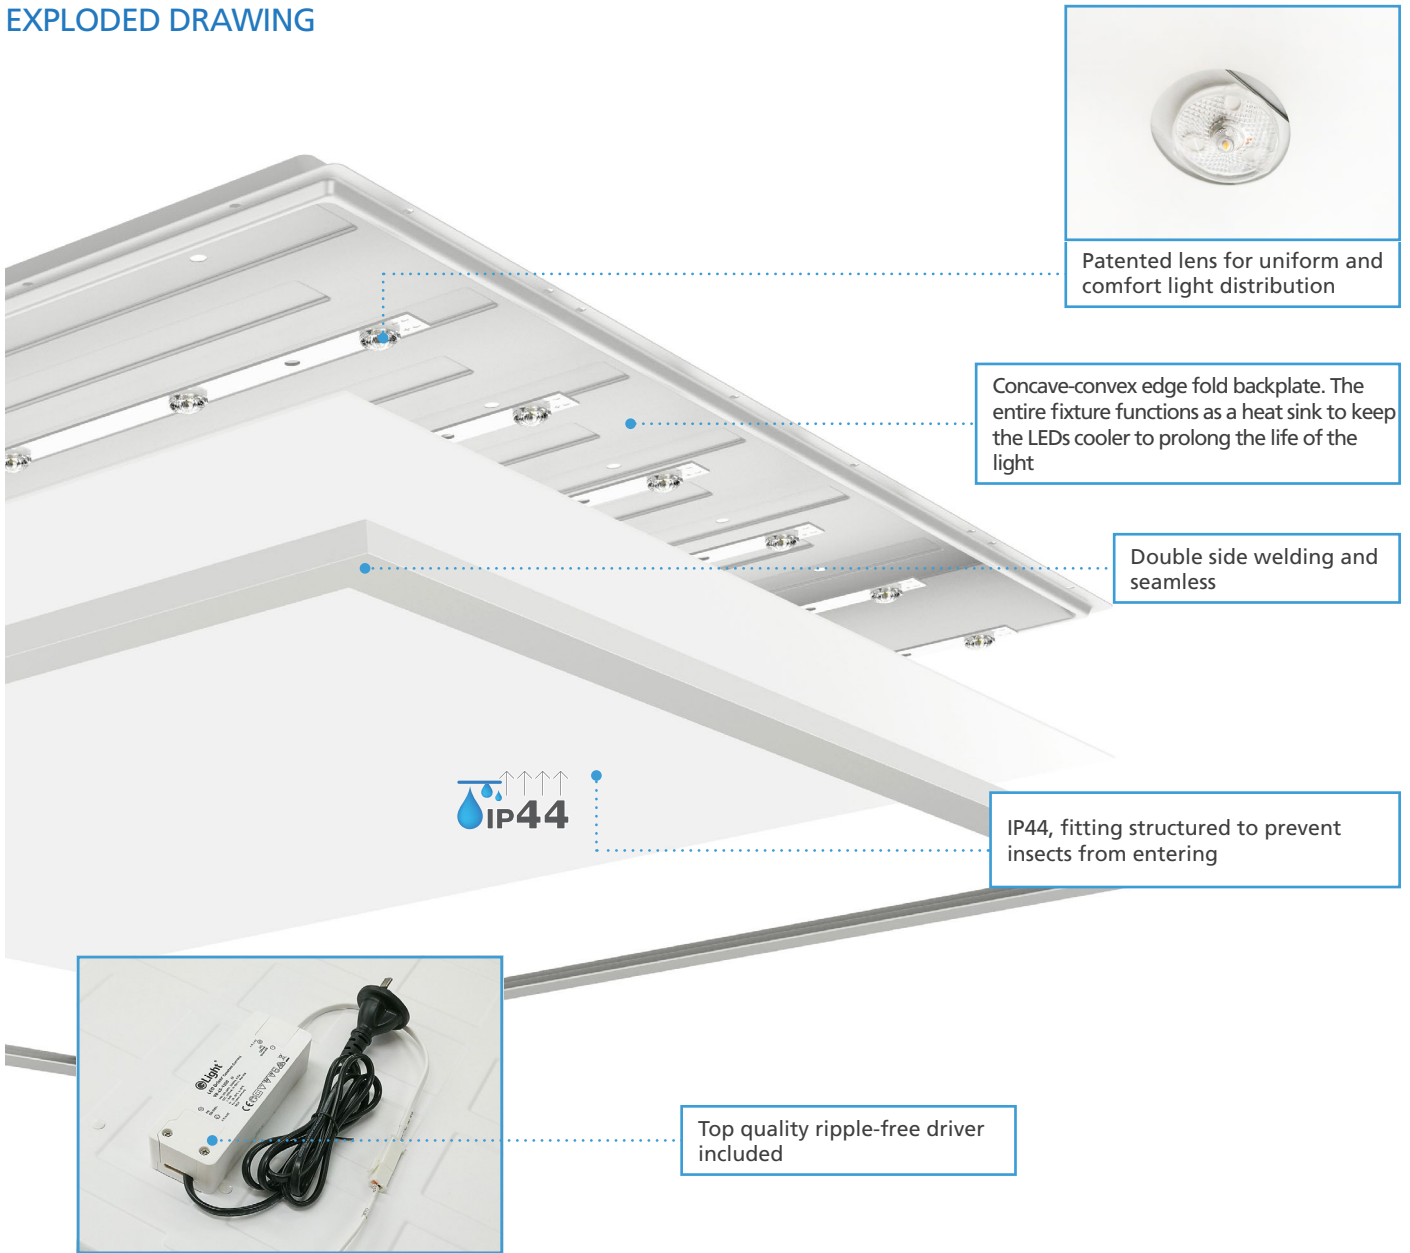

The backlit troffer light avoids the following common problems because of the inherent advantages of its structure.

